


<b>G.V.W.R.</b>	20,000#	<b>Axle</b>	(2) 10,000# Dual Wheel Elec. Brake - Oil Bath
<b>G.A.W.R. (Ea. Axle)</b>	10,000#	<b>Supension</b>	Multi-Leaf Slipper Spring w/Equalizers
<b>Coupler</b>	25K Square Adjustable 2-5/16" Ball	<b>Tire</b>	ST235/80 R-16 Load Range E
<b>Jack</b>	Two 12K Drop Leg Jacks (Bolted On)	<b>Wheel</b>	16" x 6" Dual 8 Bolt
<b>Frame</b>	12" x 16# I-Beam	<b>Lights</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>Crossmembers</b>	3" Channel	<b>Elec. Plug</b>	7 Way Semi Style
<b>Ramps</b>	2 Formed 1/8" Diamond Plate 8' Long	<b>Finish (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>Floor</b>	2 Formed 1/8" Diamond Plate Runners 25" Wide	<b>FINISH</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.

## Standard Features

- 4-Trailer Transport Dual Ball Towers
- 9,000# Winch w/Remote Access at Center of Trailer
- 102" Wide
- 51' Load Bed
- Stake Pockets & Rubrail
- Modular Sealed Wiring Harness
- Electric Brakes on Both Axles
- Complete Break-A-Way System w/Battery & Charger
- Safety Reflective Marker Tape
- Spare Tire Mount
- Radial Tires
- 12V Deep Cycle Battery
- (2) 18" x 18" x 36" Tool Boxes
- Center Mounted Turn Signals
- Center Mounted Ball Tower Track w/5' Ramp
- (12) Auto Tie Down Ratchet Assemblies
- Grommet Mount Sealed LED Lighting
- Spare Tire - Standard Equipped **NEW!**

## Description

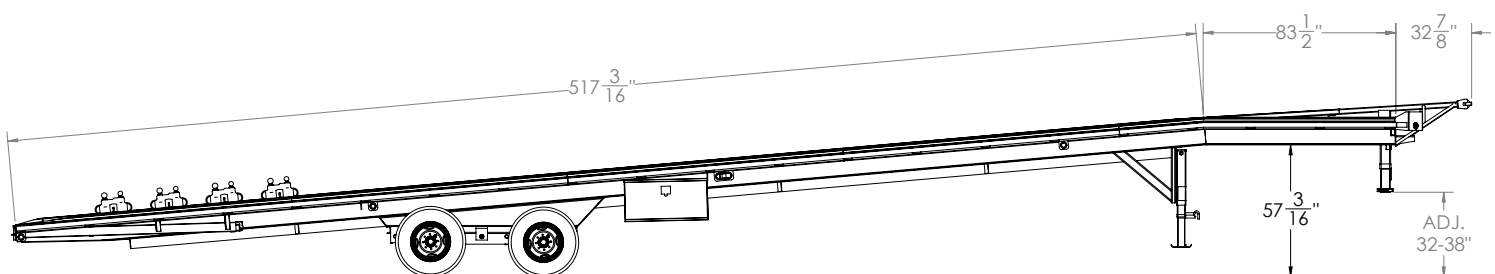

# 20AC Tandem Dual Gooseneck Auto/Combo ●



Model	Weight*	Description
20AC-51	8,000#	102" x 51' Auto/Trailer Transport

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

Category	Description
COUPLER	King Pin in Lieu of 2-5/16" Coupler
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G)
POWER	Wireless Remote
POWER	5 Watt Solar Charger
POWER	110V Charger
BODY	Delete Winch, Track Ball Towers